

UM-1 Series with Mounting Kits





Actuator with Kits

Weight: 2 kgs

Specification				Speed (sec.)		Output Torque kgf/cm		
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC
10W	0.6A	0.3A	0.1A	1	2	75	80	100
				5	15	181	214	400
				10		350	362	
15W	0.7A	0.4A	-	1	-	127	132	-
				10		410	432	

The Size of Valve			
Screwed Ends	Flanged Ends	True Union Ball Valve	3-Way Valve
1/4" ~ 1.1/2"	1/2" ~ 1"	1/2" ~ 1.1/2"	1/2" ~ 1"

• Action interval: 5 minutes per travel.

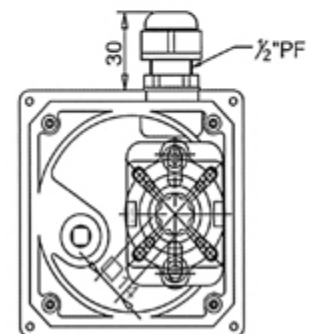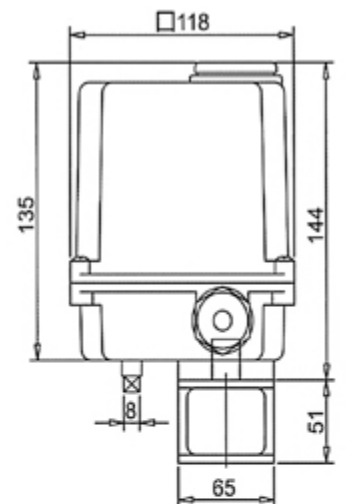

ISO 5211 F03/F05/F07

POSITION CONTROL

• Position control of output signal:

Five kind of output signal

(can be switched).

• 100 ~ 120 VAC and 200 ~ 250 VAC

(can be switched).


• It can be indicated of flow rate position.



Position control panel



Controller

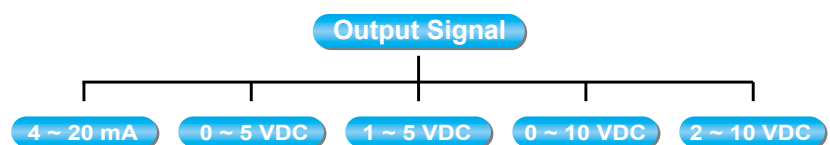

(1) Function

The valve position transforms to signal.

(2) Flow chart

