

T-ONE-S (MFG) TRADING INC.



uniwu GROUP

LOW LIFT SAFETY RELIEF VALVE
FULL BORE SAFETY RELIEF VALVE
BRONZE. FC. WCB. SUS304/316.



Industrial Valve • Steam Assortment • Air Control Unit

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: PTFE (SVP-B27)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-B27 (0.3-10K/20K)

MODEL: SVP-B27 (7-10K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: PTFE (SVP-B29)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-B29 (0.3-10K/20K)

MODEL: SVP-B29 (7-10K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
BODY: BRONZE. DISC/SEAT: SUS304.
SEAL: PTFE (SVP-S67)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-S67 (0.3-10K/20K)

MODEL: SVP-S67 (7-10K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
BODY: BRONZE. DISC/SEAT: SUS304.
SEAL: PTFE (SVP-S69)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-S69 (0.3-10K/20K)

MODEL: SVP-S69 (7-10K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: PTFE (SVP-B9A)
SET P: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-B9A (0.3-10K/20-30K)

MODEL: SVP-B9A (2-10K/20K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: PTFE (SVP-B9L)
SET P: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-B9L (0.3-10K/20-30K)

MODEL: SVP-B9L (2-10K/20K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: SUS304.
SEAL: PTFE (SVP-BS9DA)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-BS9A (0.3-10K/20K)

MODEL: SVP-BS9A (2-10K/20K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: SUS304.
SEAL: PTFE (SVP-BS9L)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-BS9L (0.3-10K/20K)

MODEL: SVP-BS9L (2-10K/20K)

**BRONZE SAFETY RELIEF VALVE**

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS. (1*2)
SEAL: PTFE (SVP-B9DA)
SET P: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-B9DA (0.3-10K/20K)

MODEL: SVP-B9DA (2-10K/20K)



BRONZE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS. (1*2)
SEAL: PTFE (SVP-B9DL)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-B9DL (0.3-10K/20K)
MODEL: SVP-B9DL (2-10K/20K)



ST.ST.304 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8.
SEAL: PTFE (SVP-S9A)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-S9A (0.3-10K/20K)
MODEL: SVP-S9A (2-10K/20K)



ST.ST.304 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8.
SEAL: PTFE (SVP-S9L)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-S9L (0.3-10K/20K)
MODEL: SVP-S9L (2-10K/20K)



ST.ST.304 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8.(1*2)
SEAL: PTFE (SVP-S9DA)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-S9DA (0.3-10K/20K)
MODEL: SVP-S9DA (2-10K/20K)



ST.ST.304 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8.(1*2)
SEAL: PTFE (SVP-S9DL)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-S9DL (0.3-10K/20K)
MODEL: SVP-S9DL (2-10K/20K)



ST.ST.316 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DA)
SET P.: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-S8DA (0.3-10K/20-30K)
MODEL: SVP-S8DA (2-10K/20K)



ST.ST.316 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DL)
SET P.: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-S8DL (0.3-10K/20-30K)
MODEL: SVP-S8DL (2-10K/20K)



ST.ST.316 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DA)
SET P.: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITHOUT LEVER)
DOUBLE FEMALE SCREWED. (FT)

MODEL: SV-S8DA(FT) (0.3-10K/20-30K)
MODEL: SVP-S8DA (FT) (2-10K/20K)



ST.ST.316 SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DL)
SET P.: 0.3-10 KGS/CM². (ALT.20/30K)
SIZE: 1/2"~2" (WITH LEVER)
DOUBLE FEMALE SCREWED. (FT)

MODEL: SV-S8DL(FT) (0.3-10K/20-30K)
MODEL: SVP-S8DL(FT) (2-10K/20K)



BRONZE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: PTFE
SET P.: 2-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH HANDLEWHEEL)
BEST FOR OIL AND WATER

MODEL: SVP-HB9A (2-10K/20K)



BRONZE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: SUS304.
SEAL: METAL
SET P.: 0.3-10 KGS/CM².
SIZE: 2.1/2" & 3" (WITHOUT LEVER)
NONCORROSIVE GAS; AIR, STEAM.

MODEL: SV-WB9A (0.3-10K/20K)



BRONZE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: FORGED BRASS.
SEAL: METAL
SET P.: 9-11 KGS/CM².
SIZE: 3/8"~3/4" (WITHOUT LEVER)
BEST FOR COMPRESSOR AIR

MODEL: SV-L1 (9-11K)



BRONZE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
DISC/SEAT: SUS304.
SEAL: VITON.
SET P.: 0.3-7 KGS/CM².
SIZE: 3/4" (WITH LEVER)
BEST FOR WATER, AIR, STEAM.

MODEL: SV-WATT (0.3-7K)



ST.ST.316 SAFETY RELIEF VALVE

INLET FLANGE / OUTLET FLANGE.
FLANGED END TO JIS 10K OR ANSI 150 LBS. DRILLED.
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DAFF)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SV-S8DAFF (0.3-10K/20K)
MODEL: SVP-S8DAFF (2-10K/20K)



ST.ST.316 SAFETY RELIEF VALVE

INLET FLANGE / OUTLET FLANGE.
FLANGED END TO JIS 10K OR ANSI 150 LBS. DRILLED.
BODY/DISC/SEAT: CF8M. (1*2)
SEAL: PTFE (SVP-S8DLFF)
SET P.: 0.3-10 KGS/CM². (ALT.20K)
SIZE: 1/2"~2" (WITH LEVER)

MODEL: SV-S8DLFF (0.3-10K/20K)
MODEL: SVP-S8DLFF (2-10K/20K)



CAST IRON SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1

DISC/SEAT: SUS304.

SET: 1 ~ 10 KGS/CM².

SIZE: 1/2"~2" (WITHOUT LEVER)

ALT. BODY: SUS 304 / SUS 316.

S34-A / S36-A (1~20 KGS/CM²)

MODEL: S3S-A / S34-A / S36-A



CAST IRON SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1

DISC/SEAT: SUS304.

SET: 1 ~ 10 KGS/CM².

SIZE: 1/2"~2" (WITH LEVER)

ALT. BODY: SUS 304 / SUS 316.

S34-LR / S36-LR (1~20 KGS/CM²)

MODEL: S3S-LR / S34-LR / S36-LR



CAST IRON SAFETY RELIEF VALVE

FLANGED END TO JIS 10K OR ANSI

150 LBS. DRILLED. DISC: SUS304.

SET P: 1 ~ 10 KGS/CM².

SIZE: 1"~12" (WITHOUT LEVER)

ALT. BODY: SUS 304 / SUS 316.

S34F-A / S36F-A (1~20 KGS/CM²)

MODEL: S3F-A / S34F-A / S36F-A



CAST IRON SAFETY RELIEF VALVE

FLANGED END TO JIS 10K OR ANSI

150 LBS. DRILLED. DISC: SUS304.

SET P: 1 ~ 10 KGS/CM².

SIZE: 1"~12" (WITH LEVER)

ALT. BODY: SUS 304 / SUS 316.

S34F-LR / S36F-LR (1~20 KGS/CM²)

MODEL: S3F-LR / S34F-LR / S36F-LR



ST.ST.316 SAFETY RELIEF VALVE

INLET: MALE / OUTLET: FEMALE

SCREWED END TO BS21, ANSI B2.1

BODY/DISC/SEAT: SUS316. (1*1)

SET P: 3.5, 7, 10 KGS/CM².

SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SS316-S67 (MF) W/O LEVER

MODEL: SS316-S69 (MF) LEVER



317 Full Bore Safety Relief Valve

ISO 9001



T-ONE-S (MFG) TRADING INC.

Cat. 2016

ST.ST.316 SAFETY RELIEF VALVE

INLET / OUTLET: FEMALE.

SCREWED END TO BS21, ANSI B2.1

BODY/DISC/SEAT: SUS316. (1*1)

SET P: 3.5, 7, 10 KGS/CM².

SIZE: 1/2"~2" (WITHOUT LEVER)

MODEL: SS316-S67 (FF) W/O LEVER



ST.ST.316 SAFETY RELIEF VALVE

INLET / OUTLET: FEMALE.

SCREWED END TO BS21, ANSI B2.1

BODY/DISC/SEAT: SUS316. (1*1)

SET P: 3.5, 7, 10 KGS/CM².

SIZE: 1/2"~2" (WITH LEVER)

MODEL: SS316-S69 (FF)



FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/SEAT: CF8M. (1*2)
DISC/SEAL: SUS316+PTFE.
SET P: 2-10 KGS/CM². (ALT.16K)
SIZE: 3/4"~2" (WITHOUT LEVER)

MODEL: SVPF-S6A (2-10K/16K)



FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY/SEAT: CF8M. (1*2)
DISC/SEAL: SUS316+PTFE.
SET P: 2-10 KGS/CM². (ALT.16K)
SIZE: 3/4"~2" (WITH LEVER)

MODEL: SVPF-S6L (2-10K/16K)



FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY: BRONZE. DISC: SUS304+PTFE SEAL.
SEAT: FORGED BRASS. (1*2)
SET P: 2-13 KGS/CM².
SIZE: 1"~1.1/4" (WITH LEVER)

MODEL: SVPF-B2L (2-13K)



FULL BORE SAFETY RELIEF VALVE

FLANGED END TO JIS 10K OR ANSI
150 LBS. DRILLED BODY/SEAT: CF8M. (1*2)
DISC/SEAL: SUS316+PTFE.
SET P: 2-10 KGS/CM². (ALT.16K)
SIZE: 3/4"~2" (WITHOUT LEVER)

INLET FLANGE / OUTLET FLANGE.

MODEL: SVPF-S6AF (2-10K/16K)



FULL BORE SAFETY RELIEF VALVE

FLANGED END TO JIS 10K OR ANSI
150 LBS. DRILLED BODY/SEAT: CF8M. (1*2)
DISC/SEAL: SUS316+PTFE.
SET P: 2-10 KGS/CM². (ALT.16K)
SIZE: 3/4"~2" (WITH LEVER)

INLET FLANGE / OUTLET FLANGE.

MODEL: SVPF-S6LF (2-10K/16K)



BODY/SEAT: CF8M. (1*2)
DISC/SEAL: SUS316+PTFE.

FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY: FC. SEAT: CF8. (1*2)
DISC/SEAL: SUS304+PTFE.
SET P: 1-10 KGS/CM². (ALT.16K)
SIZE: 1"~2" (WITHOUT LEVER)

INLET SCREW / OUTLET SCREW.

MODEL: SVPF-10SA (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1
BODY: FC. SEAT: CF8. (1*2)
DISC/SEAL: SUS304+PTFE.
SET P: 1-10 KGS/CM². (ALT.16K)
SIZE: 1"~2" (WITH LEVER)

INLET SCREW / OUTLET SCREW.

MODEL: SVPF-10SLR (1-10K/16K)



BODY: FC. SEAT: CF8. (1*2)
DISC/SEAL: SUS304+PTFE.

FULL BORE SAFETY RELIEF VALVE

FLANGED 10K/150 TO SCREWED END

BODY: FC. SEAT: CF8. (1*2)

DISC/SEAL: SUS304+PTFE.

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1"~2" (WITHOUT LEVER)

ALT. SIZE: (1*2)

INLET FLANGE / OUTLET SCREW.

MODEL: SVPF-12SA (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

FLANGED 10K/150 TO SCREWED END

BODY: FC. SEAT: CF8. (1*2)

DISC/SEAL: SUS304+PTFE.

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1"~2" (WITH LEVER)

ALT. SIZE: (1*2)

INLET FLANGE / OUTLET SCREW.

MODEL: SVPF-12SLR (1-10K/16K)



BODY: FC. SEAT: CF8. (1*2)

DISC/SEAL: SUS304+PTFE.

FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1

BODY/DISC/SEAT: CF8. (1*2)

SEAL: PTFE (SVPF-14SA)

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1.1/2"~2" (WITHOUT LEVER)

INLET SCREW / OUTLET SCREW.

MODEL: SVF-14SA (1-10K/16K)

MODEL: SVPF-14SA (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

SCREWED END TO BS21, ANSI B2.1

BODY/DISC/SEAT: CF8. (1*2)

SEAL: PTFE (SVPF-14SLR)

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1.1/2"~2" (WITH LEVER)

INLET SCREW / OUTLET SCREW.

MODEL: SVF-14SLR (1-10K/16K)

MODEL: SVPF-14SLR (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

FLANGED 10K/150 TO SCREWED END

BODY/DISC/SEAT: CF8. (1*2)

SEAL: PTFE (SVPF-16SA)

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1.1/2"~2" (WITHOUT LEVER)

INLET FLANGE / OUTLET SCREW.

MODEL: SVF-16SA (1-10K/16K)

MODEL: SVPF-16SA (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

FLANGED 10K/150 TO SCREWED END

BODY/DISC/SEAT: CF8. (1*2)

SEAL: PTFE (SVPF-16SLR)

SET P: 1-10 KGS/CM². (ALT.16K)

SIZE: 1.1/2"~2" (WITH LEVER)

INLET FLANGE / OUTLET SCREW.

MODEL: SVF-16SLR (1-10K/16K)

MODEL: SVPF-16SLR (1-10K/16K)



FULL BORE SAFETY RELIEF VALVE

FLANGED - SCREWED END.

SCREWED END TO BS21, ANSI B2.1
BODY: FC. (1*2) DISC: SUS304
SEAT: SUS304 / SUS316.
SET P.: 20 KGS/CM². (300 PSI)
SIZE: 1/2"~2" (WITHOUT LEVER)

ALT. BODY: SCS13 / SCS14. (1*2)

MODEL: SVF-20SA (20K)



FULL BORE SAFETY RELIEF VALVE

FLANGED - SCREWED END.

SCREWED END TO BS21, ANSI B2.1
BODY: FC. (1*2) DISC: SUS304
SEAT: SUS304 / SUS316.
SET P.: 20 KGS/CM². (300 PSI)
SIZE: 1/2"~2" (WITH LEVER)

ALT. BODY: SCS13 / SCS14. (1*2)

MODEL: SVF-20SLR (20K)




FULL BORE SAFETY RELIEF VALVE

FLANGED - FLANGED END.

BODY: SCS13 / SCS14. (1*2)
SEAT: SUS304 / SUS316.
SET P.: 10-20 KGS/CM². (300 PSI)
SIZE: 1/2"~2"

MODEL: SVF-20FA (20K)

MODEL: SVF-20FLR (20K)

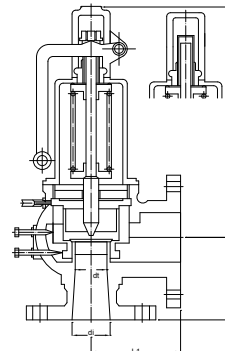

FULL BORE SAFETY RELIEF VALVE

FLANGED - FLANGED END.

BODY: FC / WCB / SCS13 / SCS14. (1*2)
SEAT: SUS304 / SUS316.
SET P.: 10-30 KGS/CM². (450 PSI)
SIZE: 3/4"~12"

CLOSED TYPE WITH LEVER.

MODEL: SVF-450CLR (30K)



FULL BORE SAFETY RELIEF VALVE

FLANGED - FLANGED END.

BODY: WCB / SCS13 / SCS14. (1*2)
SEAT: SUS304 / SUS316.
SET P.: 20-60 KGS/CM². (900 PSI)
SIZE: 1/2"~12"

MODEL: SVF-600A (WITHOUT)

MODEL: SVF-600LR (WITH LEVER)



Since 1968

T-ONE-S (MFG) TRADING INC.

9 LANE 154 CHILIN ROAD TAIPEI TAIWAN

Tel: +886-2-2521-9297 (Rep.)

Fax: +886-2-2581-1229 · 2581-5339

E-Mail: tones317@ms5.hinet.net

<http://www.317valve.com>

